




## ALLUMINIUM COPPER BI-METALLIC CRIMP LUG

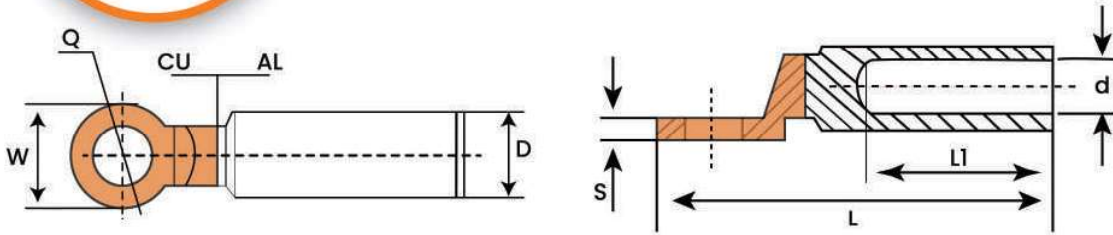

SL. NO.	CAT NO	AREA MM2	DIMENSION						
			O+/-0.3	D+/-0.2	d+/-0.2	L+/-2	L1+/-2	W+/-0.2	S+/-0.2
1	DPBM-1	16	10.5	16.0	6.5	80.0	42.0	20.0	3.0
2	DPBM-2	25	10.5	16.0	7.5	80.0	42.0	20.0	3.0
3	DPBM-3	35	10.5	16.0	8.5	80.0	42.0	20.0	3.0
4	DPBM-4	50	12.8	20.0	9.8	90.0	43.0	25.0	4.5
5	DPBM-5	70	12.8	20.0	11.5	90.0	43.0	25.0	4.5
6	DPBM-6	95	12.8	20.0	13.5	90.0	43.0	25.0	4.5
7	DPBM-7	120	12.8	25.0	15.0	114.0	60.0	30.0	5.5
8	DPBM-8	150	12.8	25.0	16.5	114.0	60.0	30.0	5.5
9	DPBM-9	185	12.8	32.0	18.5	118.0	60.0	35.0	6.0
10	DPBM-10	240	12.8	32.0	21.5	118.0	60.0	35.0	6.0
11	DPBM-11	300	12.8	34.0	23.5	127.0	72.0	35.0	6.0
12	DPBM-12	400	17.0	40.0	26.0	160.0	93.0	36.0	7.0
13	DPBM-13	500	17.0	47.0	29.5	160.0	94.0	36.0	7.0
14	DPBM-14	630	17.0	47.0	32.5	180.0	94.0	50.0	9.0

\*COPPER >= 99.9%

\*ALUMINIUM >= 99.5%

\* SUITABLE FOR ALUMINIUM TO COPPER TERMINATION

\*FRICTION WELDED

\*ALUMINIUM BARREL IS FILLED WITH NETURAL GREASE AND COVERED BY CAP